


Rodamiento oscilante dos hileras de rodillos 22232-CC-C3-W33-SKF

22232-CC-C3-W33-SKF

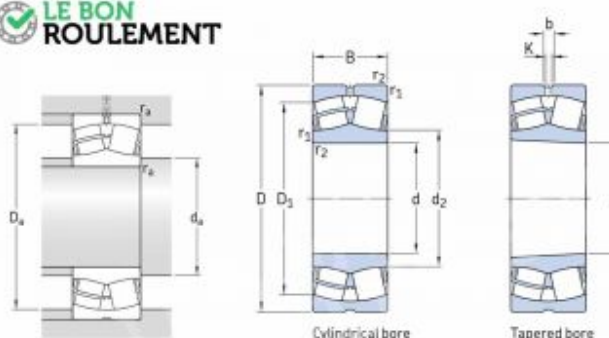

Principal dimensions			Basic load ratings		Fatigue load limit	Speed ratings		Mass	Designations		
d	D	B	dynamic C	static C ₀	P ₀	Reference speed	Limiting speed	kg	Bearing with cylindrical bore		tapered bore
mm			kN		kN	r/min			—		
160	290	80	1 000	1 290	318	2 000	2 800	22,5	* 22232 CC/W33		* 22232 CCK/W33

Dimensions						Abutment and fillet dimensions			Calculation factors			
d	d ₂	D ₁	b	K	r _{1,2}	d ₀	D ₀	r ₀	e	Y ₁	Y ₂	Y ₃
mm					mm	mm	mm	mm	—			
160	191	250	33,9	7,5	3	174	276	2,5	0,26	2,6	3,9	2,5



**Rodamiento oscilante dos hileras de rodillos 22232-CC-
C3-W33-SKF**

Caractéristique	Valeur
d - Diámetro interior (mm)	160
D - Diámetro exterior (mm)	290
C - Espesor (mm)	80
Marca	SKF
Tipo del rodamiento	Con rodillos oscilantes
Juego	Alta velocidad (C3, J30)
Tipo de sellado	No estanco
Tipo de jaula	Acero
Agujero	Cilíndrico/a
Rodamiento serie	22200
Unidad de venta	pieza

