


Rodamiento oscilante dos hileras de rodillos 22311-E-VA405-SKF

22311-E-VA405-SKF

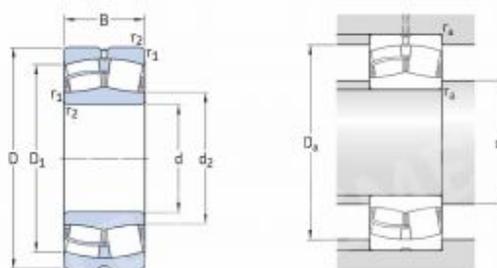

Principal dimensions	Basic load ratings	Fatigue load	Speed ratings	Mass	Designations					
d D B	C C ₀	P ₀	Ref. lim- one speed limb- one speed	kg	Bearing with cylindrical bore tapered bore					
mm	kN	kN	1/min	kg	-					
55	120	43	270	290	30	4 200	5 400	2 45	22311 E/VA405	* 22311 ER/VA405

Dimensions	Abutment and fillet dimensions	Calculation factors	Permissible accelerations											
d d ₂ D ₁ b K	r _{1,2} r ₀ D ₀ r ₀	ε Y ₁ Y ₂ Y ₀	For all lubricants rotational times											
mm	mm	-	m/s ²											
55	70,1	102	5,1	3	2	66	109	2	0,25	1,9	2,9	1,8	70 g	29 g



Rodamiento oscilante dos hileras de rodillos 22311-E-VA405-SKF

Caractéristique	Valeur
d - Diámetro interior (mm)	55
D - Diámetro exterior (mm)	120
C - Espesor (mm)	43
Marca	SKF
Tipo del rodamiento	Con rodillos oscilantes
Juego	Estándar
Tipo de sellado	No estanco
Tipo de jaula	Acero
Agujero	Cilíndrico/a
Especificaciones	Para aplicacion vibrante
Rodamiento serie	22300
Unidad de venta	pieza

