


Rodamiento oscilante dos hileras de rodillos 22313-E-VA405-SKF

22313-E-VA405-SKF

 **LE BON ROULEMENT**

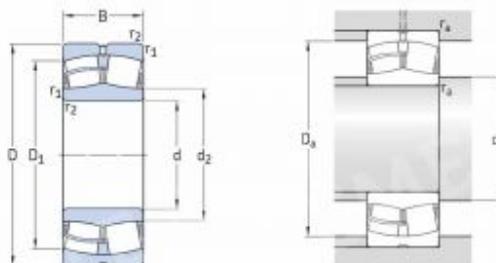

Principal dimensions	Basic load ratings	Fatigue load limit	Speed ratings	Mass	Designations					
d	D	B	C ₀	K ₀	Designing with cylindrical bore					
mm	mm	mm	mm	revs/min	kg					
65	140	48	340	360	38	3800	5000	5,76	* 22313-E-VA405	* 22313-E-VA405

Dimensions			Mounting and fillet dimensions			Calculation factors			Permissible accelerations for all lubricants			
d	d ₁	D ₁	b	K	r _{1,2}	d ₂	D ₂	r _{2, max.}	g	V ₁	V ₂	V ₃
mm	mm	mm	mm		mm	mm	mm	mm				
65	81,6	118	8,3	4,5	2,2	77	128	2	0,35	1,9	2,8	1,8



[Commander sur El Mejor Rodamiento](#)

[Contacter le service client](#)

Rodamiento oscilante dos hileras de rodillos 22313-E-VA405-SKF

Caractéristique	Valeur
d - Diámetro interior (mm)	65
D - Diámetro exterior (mm)	140
C - Espesor (mm)	48
Marca	SKF
Tipo del rodamiento	Con rodillos oscilantes
Juego	Estándar
Tipo de sellado	No estanco
Tipo de jaula	Acero
Agujero	Cilíndrico/a
Especificaciones	Para aplicacion vibrante
Rodamiento serie	22300
Unidad de venta	pieza

