


Rodamiento oscilante dos hileras de rodillos 22320-E-JA-VA405-SKF

22320-E-JA-VA405-SKF

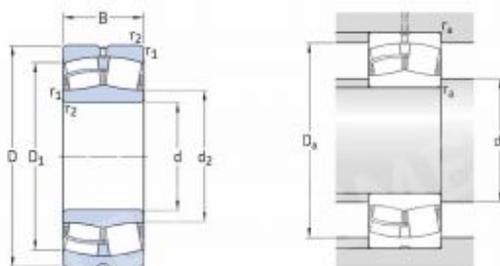

Principal dimensions	Basic load ratings	Fatigue load	Speed ratings	Mass	Designations					
d D B	C C ₀	P ₀	Ref- lim- one speed limb- one speed	kg	Bearings with cylindrical bore tapered bore					
mm	kN	kN	1/min							
100	215	75	815	950	88	2400	3050	12,5	22320-E-JA/VA405	22320-EK-JA/VA405

Clearances	Abutment and fillet dimensions	Calculation factors	Permissible accelerations											
d d ₂ D ₁ b K	r _{1,2} r ₀ D ₀ r ₀	ε Y ₁ Y ₂ Y ₃	For all lubricants rotational linear											
mm	mm		m/s ²											
100	130	104	21,3	6	3	114	201	2,8	0,23	2	3	2	54g	20g



**Rodamiento oscilante dos hileras de rodillos 22320-E-JA-
VA405-SKF**

Caractéristique	Valeur
d - Diámetro interior (mm)	100
D - Diámetro exterior (mm)	215
C - Espesor (mm)	73
Marca	SKF
Tipo del rodamiento	Con rodillos oscilantes
Juego	Estándar
Tipo de sellado	No estanco
Tipo de jaula	Acero
Agujero	Cilíndrico/a
Especificaciones	Para aplicacion vibrante
Rodamiento serie	22300
Unidad de venta	pieza

