


23136-CC-K-W33-SKF



Principal dimensions			Basic load ratings		Fatigue load limit	Speed ratings	Mass	Designations	
d	D	B	dynamic	static	P_0	Reference speed	Limiting speed	bearing with cylindrical bore	tapered bore
mm			kN	kN		r/min	kg		
180	300	96	1 200	1 760	360	1 700	2 700	* 23136 CC/W33	* 23136 CCK/W33

Dimensions						Abutment and fillet dimensions			Calculation factors			
d	d_f	D_f	b	K	$r_{1,2}$	d_a	D_a	r_a	α	Y_1	Y_2	Y_0
mm					mm	mm	mm	mm	°			
180	207	259	13.9	7.5	3	194	286	2.5	0.3	2.3	3.6	2.2

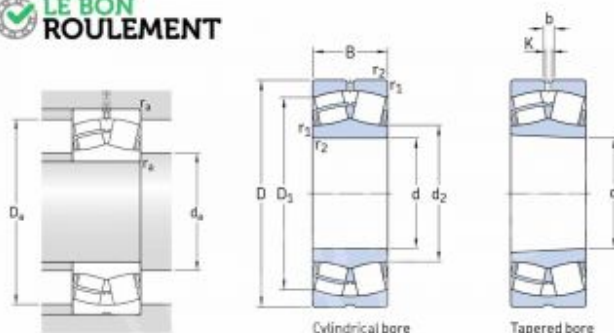

Rodamiento oscilante dos hileras de rodillos 23136-CC-K-W33-SKF

Caractéristique	Valeur
d - Diámetro interior (mm)	180
D - Diámetro exterior (mm)	300
C - Espesor (mm)	96
Marca	SKF
Tipo del rodamiento	Con rodillos oscilantes
Juego	Estándar
Tipo de sellado	No estanco
Tipo de jaula	Acero
Agujero	Cónico/a
Rodamiento serie	23100
Unidad de venta	pieza

