


Rodamiento axial de rodillos cónicos 29412-E-SKF

29412-E-SKF

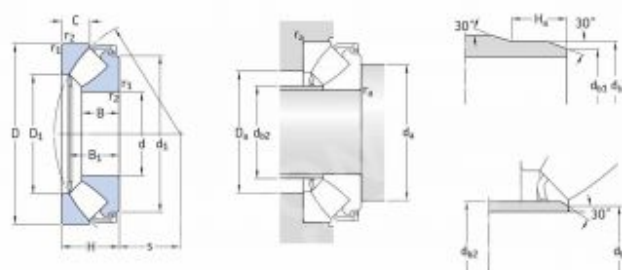

Principal dimensions			Basic load ratings		Fatigue	Minimum	Speed ratings		Mass	Designation
d	D	B	C	C ₀	P ₀	A	Reference speed	Limiting speed	kg	
mm				kN	kN	—	rpm	rpm		
60	130	42	390	915	334	0.08	2 800	5 000	2.6	* 29412E

Dimensionless										Abutment and fillet dimensions				
d	d ₁	D ₁	B	B ₁	C	r _{1,2}	s	d ₄	d ₄₁	d ₄₂	H ₁	D ₂	r _s	
mm						mm		mm	mm	mm	mm	mm	mm	
60	332	85.5	27	34.7	25	1.5	38	90	67	67	—	107	3.5	



Rodamiento axial de rodillos cónicos 29412-E-SKF

Caractéristique	Valeur
d - Diámetro interior (mm)	60
D - Diámetro exterior (mm)	130
C - Espesor (mm)	42
Marca	SKF
Tipo del rodamiento	Rodamiento axial de rodillos cónicos
Tipo de jaula	Acero
Rodamiento serie	29400
Unidad de venta	pieza

