


Rodamiento axial de rodillos cónicos 29320-E-SKF

29320-E-SKF

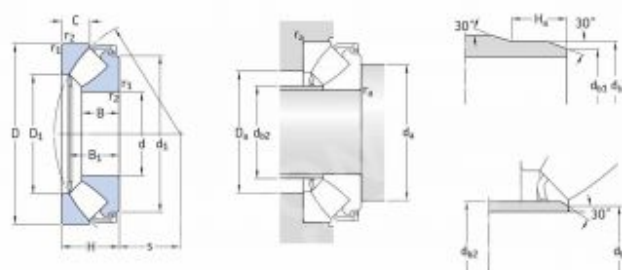

Principal dimensions			Basic load ratings		Fatigue load limit	Minimum load factor	Speed ratings		Mass	Designation
d	D	B	C	C ₀	P ₀	A	Reference speed	Limiting speed	kg	
mm				kN	kN	—	1/min	1/min		—
200	170	42	465	1 290	256	0.16	2 200	3 600	3.65	* 29320 E

Dimensionless										Abutment and fillet dimensions				
d	d ₁	D ₁	B	B ₁	C	r _{1,2}	s	d ₄	d ₄₁	d ₄₂	H ₁	D ₂	r _s	
mm						mm		mm						
200	152	128	26.2	26.3	20.5	1.5	58	130	97	97	—	147	3.5	



Rodamiento axial de rodillos cónicos 29320-E-SKF

Caractéristique	Valeur
d - Diámetro interior (mm)	100
D - Diámetro exterior (mm)	170
C - Espesor (mm)	42
Marca	SKF
Tipo del rodamiento	Rodamiento axial de rodillos cónicos
Tipo de jaula	Acero
Rodamiento serie	29300
Unidad de venta	pieza

