


Rodamiento axial de rodillos cónicos 29424-E-SKF

29424-E-SKF

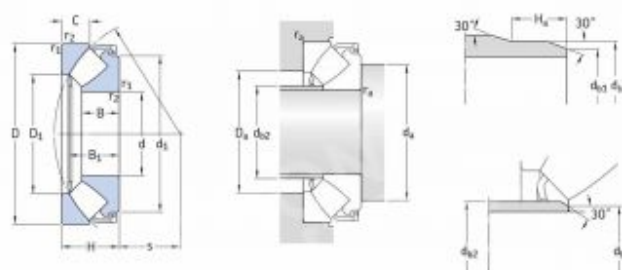

Principal dimensions			Basic load ratings		Fatigue	Minimum	Speed ratings		Mass	Designation
d	D	B	C	C ₀	P ₀	A	Reference speed	Limiting speed	kg	
mm				kN	kN	—	1/min	1/min		—
220	250	70	1 370	3 450	375	1.1	1 500	2 600	275	* 29424 E

Dimensions								Abutment and fillet dimensions					
d	d ₁	D ₁	B	B ₁	C	r _{1,2}	s	d ₄	d ₄₁	d ₄₂	H ₄	D ₄	r _s
mm						min		min	max.	max.	min.	max.	max.
220	214	171	50.5	70.3	34.5	A	74	180	132	142	—	209	3



Rodamiento axial de rodillos cónicos 29424-E-SKF

Caractéristique	Valeur
d - Diámetro interior (mm)	120
D - Diámetro exterior (mm)	250
C - Espesor (mm)	78
Marca	SKF
Tipo del rodamiento	Rodamiento axial de rodillos cónicos
Tipo de jaula	Acero
Rodamiento serie	29400
Unidad de venta	pieza

