


Rodamiento axial de rodillos cónicos 29428-E-SKF

29428-E-SKF

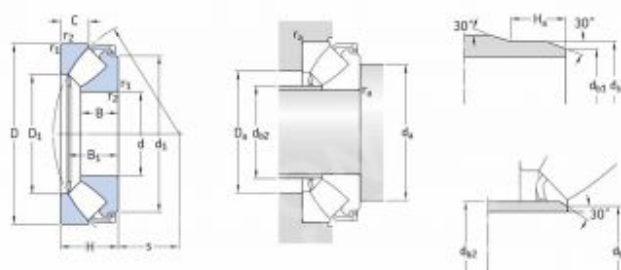

Principal dimensions			Basic load ratings		Fatigue load limit	Minimum load factor	Speed ratings		Mass	Designation
d	D	B	C	C ₀	P ₀	A	Reference speed	Limiting speed	kg	
mm				kN	kN	—	1/min	2/min		—
240	280	85	1 630	4 300	455	1.8	1 300	2 600	23	* 29428 E

Dimensions										Abutment and fillet dimensions			
d	d ₁	D ₁	B	B ₁	C	r _{1,2}	r	d ₄	d ₄₁	d ₄₂	H ₄	D ₄	r _s
mm						mm		mm	mm	mm	mm	mm	mm
240	245	395	54	75.8	61	4	86	205	153	162	—	236	3



Rodamiento axial de rodillos cónicos 29428-E-SKF

Caractéristique	Valeur
d - Diámetro interior (mm)	140
D - Diámetro exterior (mm)	280
C - Espesor (mm)	85
Marca	SKF
Tipo del rodamiento	Rodamiento axial de rodillos cónicos
Tipo de jaula	Acero
Rodamiento serie	29400
Unidad de venta	pieza

