


Rodamiento axial de rodillos cónicos 29230-E-SKF

29230-E-SKF

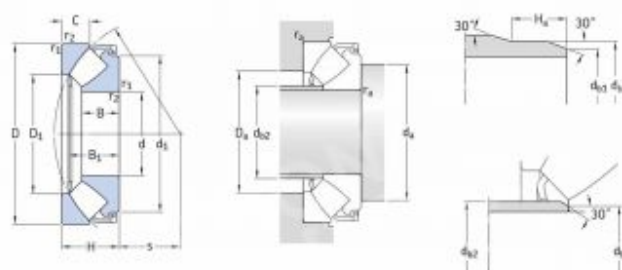

Principal dimensions			Basic load ratings		Fatigue	Minimum	Speed ratings		Mass	Designation
d	D	H	C	C ₀	P ₀	A	Reference speed	Limiting speed	kg	—
mm			kN		kN	—	min			
150	225	99	408	1 600	580	0,24	1 800	2 800	4,3	29230 E

Dimensions								Abutment and fillet dimensions					
d	d ₁	D ₁	B	B ₁	C	r _{1,2} mm	s	d ₄ mm	d ₄₁ max.	d ₄₂ max.	H ₁ mm	D ₂ max.	r _s max.
mm								mm					
150	200	176	24	34,3	20,5	1,1	82	180	154	154	14	193	1,5



Rodamiento axial de rodillos cónicos 29230-E-SKF

Caractéristique	Valeur
d - Diámetro interior (mm)	150
D - Diámetro exterior (mm)	215
C - Espesor (mm)	39
Marca	SKF
Tipo del rodamiento	Rodamiento axial de rodillos cónicos
Tipo de jaula	Acero
Rodamiento serie	29200
Unidad de venta	pieza

