


Rodamiento axial de rodillos cónicos 29438-E-SKF

29438-E-SKF

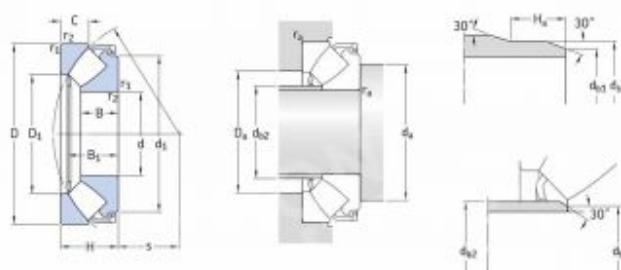

Principal dimensions			Basic load ratings		Fatigue load limit	Minimum load factor	Speed ratings		Mass	Designation
d	D	B	C	C ₀	P ₀	A	Reference speed	Limiting speed	kg	
mm				kN	kN	—	1/min	1/min		—
290	380	225	2 850	8 000	765	0.3	950	1 700	62.5	* 29438 E

Dimensions										Abutment and fillet dimensions			
d	d ₁	D ₁	B	B ₁	C	r _{1,2}	s	d ₄	d ₄₁	d ₄₂	H ₄	D ₄	r _s
mm	—	—				min		min	max.	max.	min.	max.	max.
290	332	265	73	101	55.5	5	117	280	297	223	—	323	4



Rodamiento axial de rodillos cónicos 29438-E-SKF

Caractéristique	Valeur
d - Diámetro interior (mm)	190
D - Diámetro exterior (mm)	380
C - Espesor (mm)	115
Marca	SKF
Tipo del rodamiento	Rodamiento axial de rodillos cónicos
Tipo de jaula	Acero
Rodamiento serie	29400
Unidad de venta	pieza

