


Rodamiento axial de rodillos cónicos 29344-E-SKF

29344-E-SKF

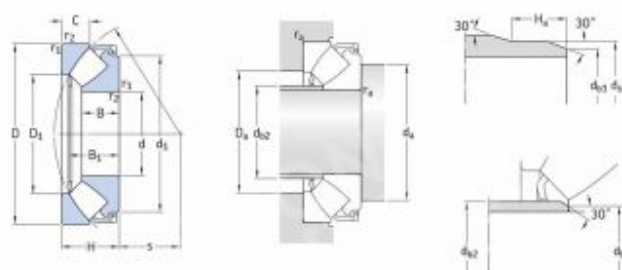

Principal dimensions			Basic load ratings dynamic static		Fatigue load limit	Minimum load factor	Speed ratings Reference speed Limiting speed		Mass	Designation
d	D	B	C	C ₀	P ₀	A			kg	
mm			kN		kN	—	1/min	1/min		—
220	360	85	2 000	8 300	600	5,8	1 000	1 700	31	* 29344 E

Dimensionless								Abutment and fillet dimensions					
d	d ₁	D ₁	B	B ₁	C	r _{1,2} mm	s	d ₄ mm	d ₄₁ max.	d ₄₂ max.	H ₁ mm	D ₂ max.	r ₅ max.
mm													
220	326	274	55	77,7	61	4	125	285	229	260	—	316	3



Rodamiento axial de rodillos cónicos 29344-E-SKF

Caractéristique	Valeur
d - Diámetro interior (mm)	220
D - Diámetro exterior (mm)	360
C - Espesor (mm)	85
Marca	SKF
Tipo del rodamiento	Rodamiento axial de rodillos cónicos
Tipo de jaula	Acero
Rodamiento serie	29300
Unidad de venta	pieza

