


Rodamiento axial de rodillos cónicos 29444-E-SKF

29444-E-SKF

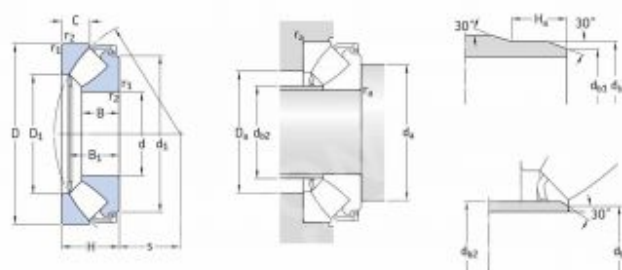

Principal dimensions			Basic load ratings		Fatigue	Minimum	Speed ratings		Mass	Designation
d	D	B	C	C ₀	P ₀	A	Reference speed	Limiting speed	kg	
mm				kN	kN	—	rpm	rpm		—
220	420	122	3 350	9 650	960	8.8	850	1 500	75	* 29444 E

Dimensions										Abutment and fillet dimensions				
d	d ₁	D ₁	B	B ₁	C	r _{1,2}	s	d ₄	d ₄₁	d ₄₂	H ₁	D ₂	r ₃	r ₄
mm						min		min	max.	max.	min.	max.	max.	
220	371	300	77	107A	58,5	6	132	315	238	254	—	358	5	



Rodamiento axial de rodillos cónicos 29444-E-SKF

Caractéristique	Valeur
d - Diámetro interior (mm)	220
D - Diámetro exterior (mm)	420
C - Espesor (mm)	122
Marca	SKF
Tipo del rodamiento	Rodamiento axial de rodillos cónicos
Tipo de jaula	Acero
Rodamiento serie	29400
Unidad de venta	pieza

