


Rodamiento axial de rodillos cónicos 29456-E-SKF

29456-E-SKF

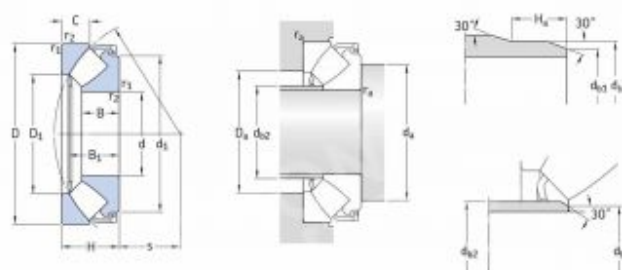

Principal dimensions			Basic load ratings		Fatigue	Minimum	Speed ratings		Mass	Designation
d	D	B	C	C ₀	P ₀	A	Reference speed	Limiting speed	kg	
mm				kN	kN	—	1/min	1/min		—
280	520	145	4 900	15 300	1 320	22	670	1 200	135	* 29456 E

Dimensions										Abutment and fillet dimensions				
d	d ₁	D ₁	B	B ₁	C	r _{1,2}	s	d ₄	d _{4,1}	d _{4,2}	H ₁	D ₂	r _s	
mm						min		min	max.	max.	min.	max.	max.	
280	464	372	95	129,5	70	6	166	395	330	320	—	446	5	



Rodamiento axial de rodillos cónicos 29456-E-SKF

Caractéristique	Valeur
d - Diámetro interior (mm)	280
D - Diámetro exterior (mm)	520
C - Espesor (mm)	145
Marca	SKF
Tipo del rodamiento	Rodamiento axial de rodillos cónicos
Tipo de jaula	Acero
Rodamiento serie	29400
Unidad de venta	pieza

