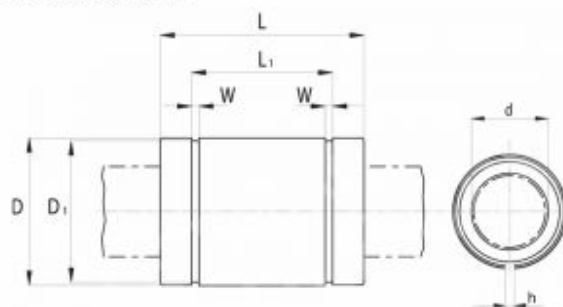


Casquillo de bolas KBS50100-PP

KBS50100-PP


**LE BON
ROULEMENT**


Type Type	Nombre reculadores Number of ball rows	Poids Weight (kg)	d (mm)	d Tolérance (μm)	D (mm)	D Tolérance (μm)	L (mm)	L Tolérance (mm)
KBS 50 100	6	1.030	50	+13 +2	75	0 + -13	100	0 + -0.3

Type Type	L ₁ (mm)	L ₁ Tolérance (mm)	W (mm)	h (mm)	D ₁ (mm)	Excentricité max Max eccentricity (μm)	Tolérance jeu radial Radial clearance tolerance (μm)	Capacité de Charge Load capacity rating (N)
KBS 50 100	77.6	0 + -0.3	2.65	2.65	72	17	-13	C ₁₀ C ₉₀



Casquillo de bolas KBS50100-PP

Caractéristique	Valeur
d - Diámetro interior (mm)	50
D - Diámetro exterior (mm)	75
C - Espesor (mm)	100
Marca	Genérica alta calidad
Tipo del rodamiento	Casquillo de bolas
Tipo de sellado	Doble estanco plástico (2RS, 2RS1, DDU, LLU, EE)
Rodamiento serie	KBS - LME
Unidad de venta	pieza

