


Unidad de rodamiento (acero inoxidable) RCJT40-N-FA125-INA

RCJT40-N-FA125-INA

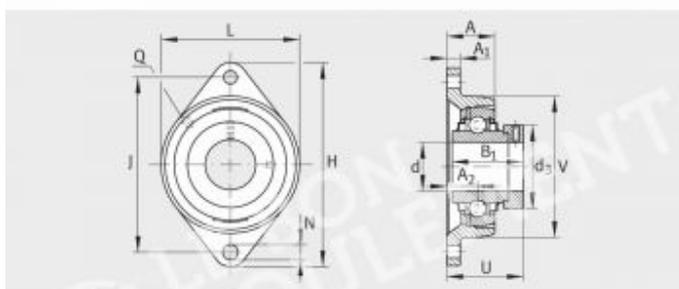

Dimension table (continued) - Dimensions in mm

Designation			Mass m → kg	Dimensions				
Unit	Housing	Radial insert ball bearing		d	L	H	A ₁	N
RCJT40-N-FA125	GG.CJT08-N-FA125.1	GE40-KRR-S-FA125.5	1,66	40	105	172	13	14

B	B ₁	I	A ₂	Q	d ₅ max.	A	U	V	Basic load ratings		End cap
									dyn. C _r N	stat. C _{0r} N	
-	56,5	143,5	24	R ₀ 1/8	58	34,5	58,9	105	32 500	19 800	RASK08



Unidad de rodamiento (acero inoxidable) RCJT40-N-FA125-INA

Caractéristique	Valeur
d - Diámetro interior (mm)	40
Entrevía	143,5
Material	Acero inoxidable
Marca	INA
Tipo de soporte	Ovalado/a 2 agujeros
Rodamiento de soporte	Fijación por aro excéntrico
Referencia del rodamiento	GE40-KRR-B-FA125.5-INA
Referencia del soporte solo	GG.CJT08-N-FA125.1-INA
Unidad de venta	pieza

