


Rodamiento de agujas RNAFW202826-IKO

RNAFW202826-IKO



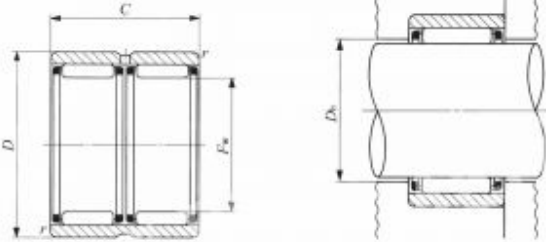

Shin. dia. mm	Identification number	Main (Ref.) B	Boundary dimensions mm				Standard mounting dimensions mm			Basic load rating C	Basic static load rating C0
			F ₂	D	C	r _a (1)	d _b	D _s Max.	D _b		
20	RNAF 202813	25	20	28	13	0.3	23.6	26	20.6	9 500	13 500
	RNAFW 202826	49.5	20	28	26	0.3	23.6	26	20.6	16 400	27 100
	RNAF 203212	37.5	20	32	12	0.3	25.4	30	20.6	12 400	14 300
	RNAFW 203224	75	20	32	24	0.3	25.4	30	20.6	21 200	28 600

Allowable
rotational
speed (2)

rpm

25 000

25 000

25 000

25 000



Rodamiento de agujas RNAFW202826-IKO

Caractéristique	Valeur
d - Diámetro interior (mm)	20
D - Diámetro exterior (mm)	28
C - Espesor (mm)	26
Marca	IKO
Tipo del rodamiento	De agujas
Tipo de sellado	No estanco
Tipo de jaula	Acero
Especificaciones	Jaula doble
Rodamiento serie	RNAF
Unidad de venta	pieza

