


Rodamiento axial de rodillos cilíndricos 81113-T2-NTN

81113-T2-NTN

LE BON ROULEMENT

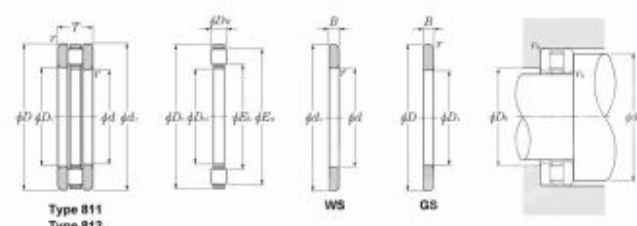

Type 811
Type 812

WS GS

Boundary dimensions										Basic load ratings				Limiting speeds	
mm										dynamic	static	dynamic	static	grease	oil
d	l	r_1	r_2	r_3	r_4	r_5	r_6	r_7	r_8	C_{10}	C_{10}	C_{10}	C_{10}		
65	90	90	67	18	65	90	7.5	5.25	1	73 000	236 000	7 400	24 100	780	3 100

Bearing numbers				Reference dimensions		Abutment dimensions			Mass		
bearing	first cylindrical roller and cage assembly	inner ring	outer ring	E_1	E_2	r_1	r_2	r_3	811	812	813
81113T2	K81113T2	WS81113	GS81113	66.8	65.2	85	70	1	0.340	0.090	0.125



Rodamiento axial de rodillos cilíndricos 81113-T2-NTN

Caractéristique	Valeur
d - Diámetro interior (mm)	65
D - Diámetro exterior (mm)	90
C - Espesor (mm)	18
Marca	NTN
Tipo del rodamiento	Rodamiento axial de rodillos cilíndrico
Tipo de jaula	Poliamido
Rodamiento serie	81100
Unidad de venta	pieza

