


Rodamiento axial de rodillos cilíndricos 81116-T2-NTN

81116-T2-NTN

LE BON ROULEMENT

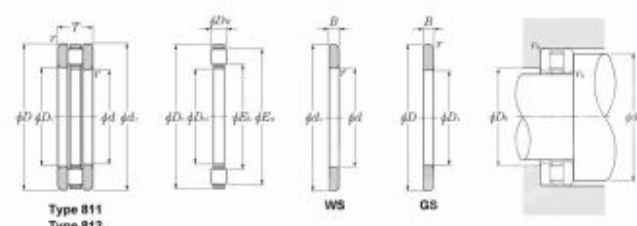

Type 811
Type 812

WS GS

Boundary dimensions										Basic load ratings				Limiting speeds	
d	l	r_1	r_2	r_3	r_4	r_5	r_6	r_7	r_8	dynamic N	static N	dynamic kgf	static kgf	rpm grease	rpm oil
80	105	105	82	19	80	105	7.5	5.75	1	79 500	279 000	8 100	28 400	650	2 600

Bearing numbers				Reference dimensions mm		Abutment dimensions mm			Mass kg		
bearing	first cylindrical roller and cage assembly	inner ring	outer ring	E_1	E_2	r_1 mm	r_2 mm	r_3 mm	811 812 800	811 812 800	811 812 800
81116T2	K81116T2	WS81116	GS81116	83.7	100.1	100	85	1	0.445	0.119	0.165



Rodamiento axial de rodillos cilíndricos 81116-T2-NTN

Caractéristique	Valeur
d - Diámetro interior (mm)	80
D - Diámetro exterior (mm)	105
C - Espesor (mm)	19
Marca	NTN
Tipo del rodamiento	Rodamiento axial de rodillos cilíndrico
Tipo de jaula	Poliamido
Rodamiento serie	81100
Unidad de venta	pieza

