


Rodamiento de agujas NAO30X52X18

NAO30X52X18

 **LE BON
ROULEMENT**

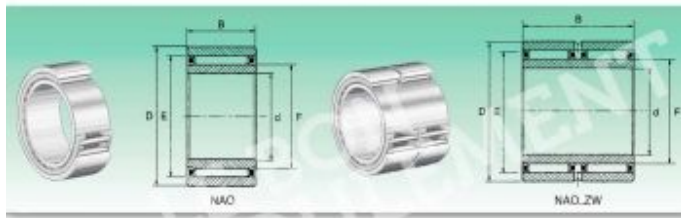

Designation Designation	Type Type	Weight (g) Poids (g)	Dimensions (mm) Dimensions (mm)					Coefficients de charge (N) Load ratings (N)			Vitesse limite Limiting Speed
			d	D	B	F	E	Dynamique C Dynamic C	Statique C ₀ Static C ₀	Unité Unit	
NAO 30x45x13		71	30	45	13	35	42	15 300	26 600	12 300	
NAO 30x45x17		100	30	45	17	35	48	19 700	36 600	12 300	
NAO 30x45x18 - ZW		153	30	45	18	35	48	26 100	53 200	12 300	
NAO 30x47x16		89.8	30	47	16	35	42	21 100	35 600	12 300	
NAO 30x47x18		108	30	47	18	35	42	26 100	40 600	12 300	
NAO 30x52x18		172	30	52	18	37	48	26 600	49 225	11 000	



Rodamiento de agujas NAO30X52X18

Caractéristique	Valeur
d - Diámetro interior (mm)	30
D - Diámetro exterior (mm)	52
C - Espesor (mm)	18
Marca	Genérica alta calidad
Tipo del rodamiento	De agujas
Tipo de sellado	No estanco
Tipo de jaula	Acero
Rodamiento serie	NAO
Unidad de venta	pieza

