


Rodamiento oscilante dos hileras de rodillos 22260-K-MB-FAG

22260-K-MB-FAG



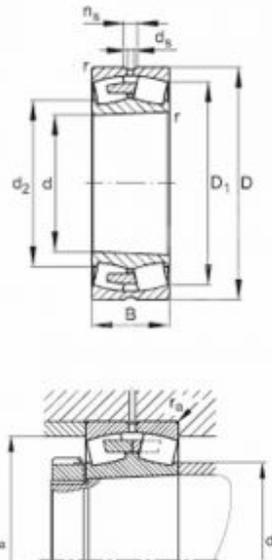

d	300 mm
D	540 mm
B	140 mm
D ₁	470,5 mm
Φ _{d,mas}	520 mm
d _{1,mas}	320 mm
d ₁	12,5 mm
r ₁	23,5 mm
r _{2mas}	4 mm
r _{2min}	5 mm
m	100 kg masse
C	3100000 N charge dyn. de base, radiale
C ₀	4250000 N charge statique de base, radiale
e	0,25
Y ₁	2,71
Y ₂	4,34
Y ₀	2,85
n ₂	1500 1/min vitesse limite
n ₀	900 1/min vitesse de base
C ₁₀	355000 N charge limite radiale à la fatigue



Rodamiento oscilante dos hileras de rodillos 22260-K-MB-FAG

Caractéristique	Valeur
d - Diámetro interior (mm)	300
D - Diámetro exterior (mm)	540
C - Espesor (mm)	140
Marca	FAG
Tipo del rodamiento	Con rodillos oscilantes
Juego	Estándar
Tipo de sellado	No estanco
Tipo de jaula	Macisa latón
Agujero	Cónico/a
Rodamiento serie	22200
Unidad de venta	pieza

